

DEUREX®

THE WAX COMPANY



合成蜡

DEUREX® EWAX
POLYETHYLENE WAXES
聚乙烯蜡

天然蜡

DEUREX® XWAX
SUGAR CANE WAXES
甘蔗蜡

复合蜡

DEUREX® HWAX
复合蜡

空气分级过程



片状蜡
e.g. DEUREX E 11 F



颗粒蜡
e.g. DEUREX E 11 G



微颗粒蜡
e.g. DEUREX A 20 K



粉末蜡
e.g. DEUREX A 20 P



细粉蜡
e.g. DEUREX E 09 A



微粉蜡
e.g. DEUREX S 3001 M



乳化蜡
e.g. DEUREX E 0908 W


DEUREX 空气分级过程

- 通过气流将蜡进行分级
- 从微细颗粒，粉末到微粉产品，具有多种供货形式
- 以风吹树作为比喻
 - 分枝不受影响(厚片)
 - 树枝掉落下来(颗粒，细颗粒)
 - 树叶在空中飞舞(粉末)
 - 花粉飞得很远(微粉产品)
- 合理，清洁，环境友好的技术
- 所有的天然蜡和合成蜡都可以通过气体分级
- 可定制特定粒径的产品
- 可提供复合产品及包覆产品
- 复合蜡是由两种或更多种蜡均匀混合而成
- 包覆蜡可以在载体上包覆不同的材料




DEUREX 包覆工艺


- 在温度较高的气体分级产品上包覆微粉或者纳米级添加剂
- 蜡和聚合物复合不同的添加剂可提供不同的特性
 - PTFE 可提供硬度和滑爽性
 - Silica 可提供消光和流动性
 - 金刚石 可提供极高的硬度
 - 复合锌 可提供消光性
 - 安息香 可提供脱气性
- 四种与众不同的包覆工艺
 - 双包覆蜡和聚合物可赋予涂料特殊性能特性
 - 全包覆蜡和聚合物
 - 点状包覆蜡和聚合物
 - 生态包覆蜡和聚合物可赋予蜡特殊性能




双包覆蜡和聚合物
可赋予涂料特殊性能特性



全包覆蜡和聚合物



点状包覆蜡和聚合物



生态包覆蜡和聚合物
可赋予蜡特殊性能

DEUREX®
AWAX

聚酰胺蜡

DEUREX®
EWAX

聚乙烯蜡

DEUREX®
PTFE

微粉PTFE

DEUREX®
HWAX

复合蜡

DEUREX®
PWAX

聚丙烯蜡

DEUREX®
SiO₂

微粉二氧化硅

DEUREX®
TWAX

费-托蜡

DEUREX®
XWAX

甘蔗蜡

气体分级蜡

DEUREX 气体分级技术可提供不同形态的产品 从小颗粒，粉末产品到微粉化产品均可提供

DEUREX 气体分级技术是一种合理、洁净、环境友好的技术，所有的天然蜡，合成蜡都可以采用 气体分级技术生产，同时也可提供定制粒径产品的生产。

复合蜡

天然复合蜡是综合了甘蔗蜡和蒙坦蜡和/或 棕榈蜡的特性

天然-合成复合蜡是综合了高酸值和高可塑性的 甘蔗蜡与高熔点和硬度的聚乙烯蜡的特性

合成复合蜡是综合了不同的合成蜡的特性，如：聚乙烯蜡和酰胺蜡

包覆蜡

包覆蜡是采用不同的蜡作为载体，包覆不同的材料，如：PTFE、二氧化硅或安息香。蜡可提高分散性并承载包覆物浮到涂料表面。达到同样的性能可添加更少的PTFE，二氧化硅或其他的包覆材料

甘蔗蜡

DEUREX X-系列的甘蔗蜡仍然是环保配方和产品的首选甘蔗蜡是纯天然的产品，在油墨、涂料的生产过程中，甘蔗蜡提升润滑性，同时也可提升色彩鲜艳度。另外，是生产环保产品的最佳选择。甘蔗蜡也可提升终端产品的抗刮性，DEUREX 的甘蔗蜡

固体产品的系统命名规则

产品的命名规则是最佳确认产品的方式

我们的系统可以让您立即确认化学结构 供应形态、粒径

A 酰胺蜡
E 聚乙烯蜡
F 聚四氟乙烯蜡
H 复合蜡
P 聚丙烯蜡
S 二氧化硅
T 费-托蜡
X 甘蔗蜡

开头2码数字
产品的内部编码

最后2码数字
粒径, 98% < x μm

P 粉末产品
K 细颗粒产品

M 微粉产品

DEUREX E 0920 M =

聚乙烯蜡

09

98% < 20 μm

微粉产品

液体产品的系统命名规则

请告知你们的要求：生化成分、溶剂、我们可提供定制生产的蜡乳液和分散体。固含量及其他重要因素，我们将非常高兴证明我们的专业并为您生产独有的产品。

A 酰胺蜡
C 复合助剂
E 聚乙烯蜡
EO 氧化聚乙烯蜡
F 聚四氟乙烯蜡
P 聚丙烯蜡
S 二氧化硅
T 费-托蜡
X 甘蔗蜡

开头2码数字
产品的内部编码

最后2码数字
粒径, 98% < x μm

O 油性分散体
S 溶剂型分散体
W 水性分散体或乳液

DEUREX E 0908 W =

聚乙烯蜡

09

98% < 08 μm


水性分散体


木器涂料

汽车涂料

船舶涂料

卷钢涂料

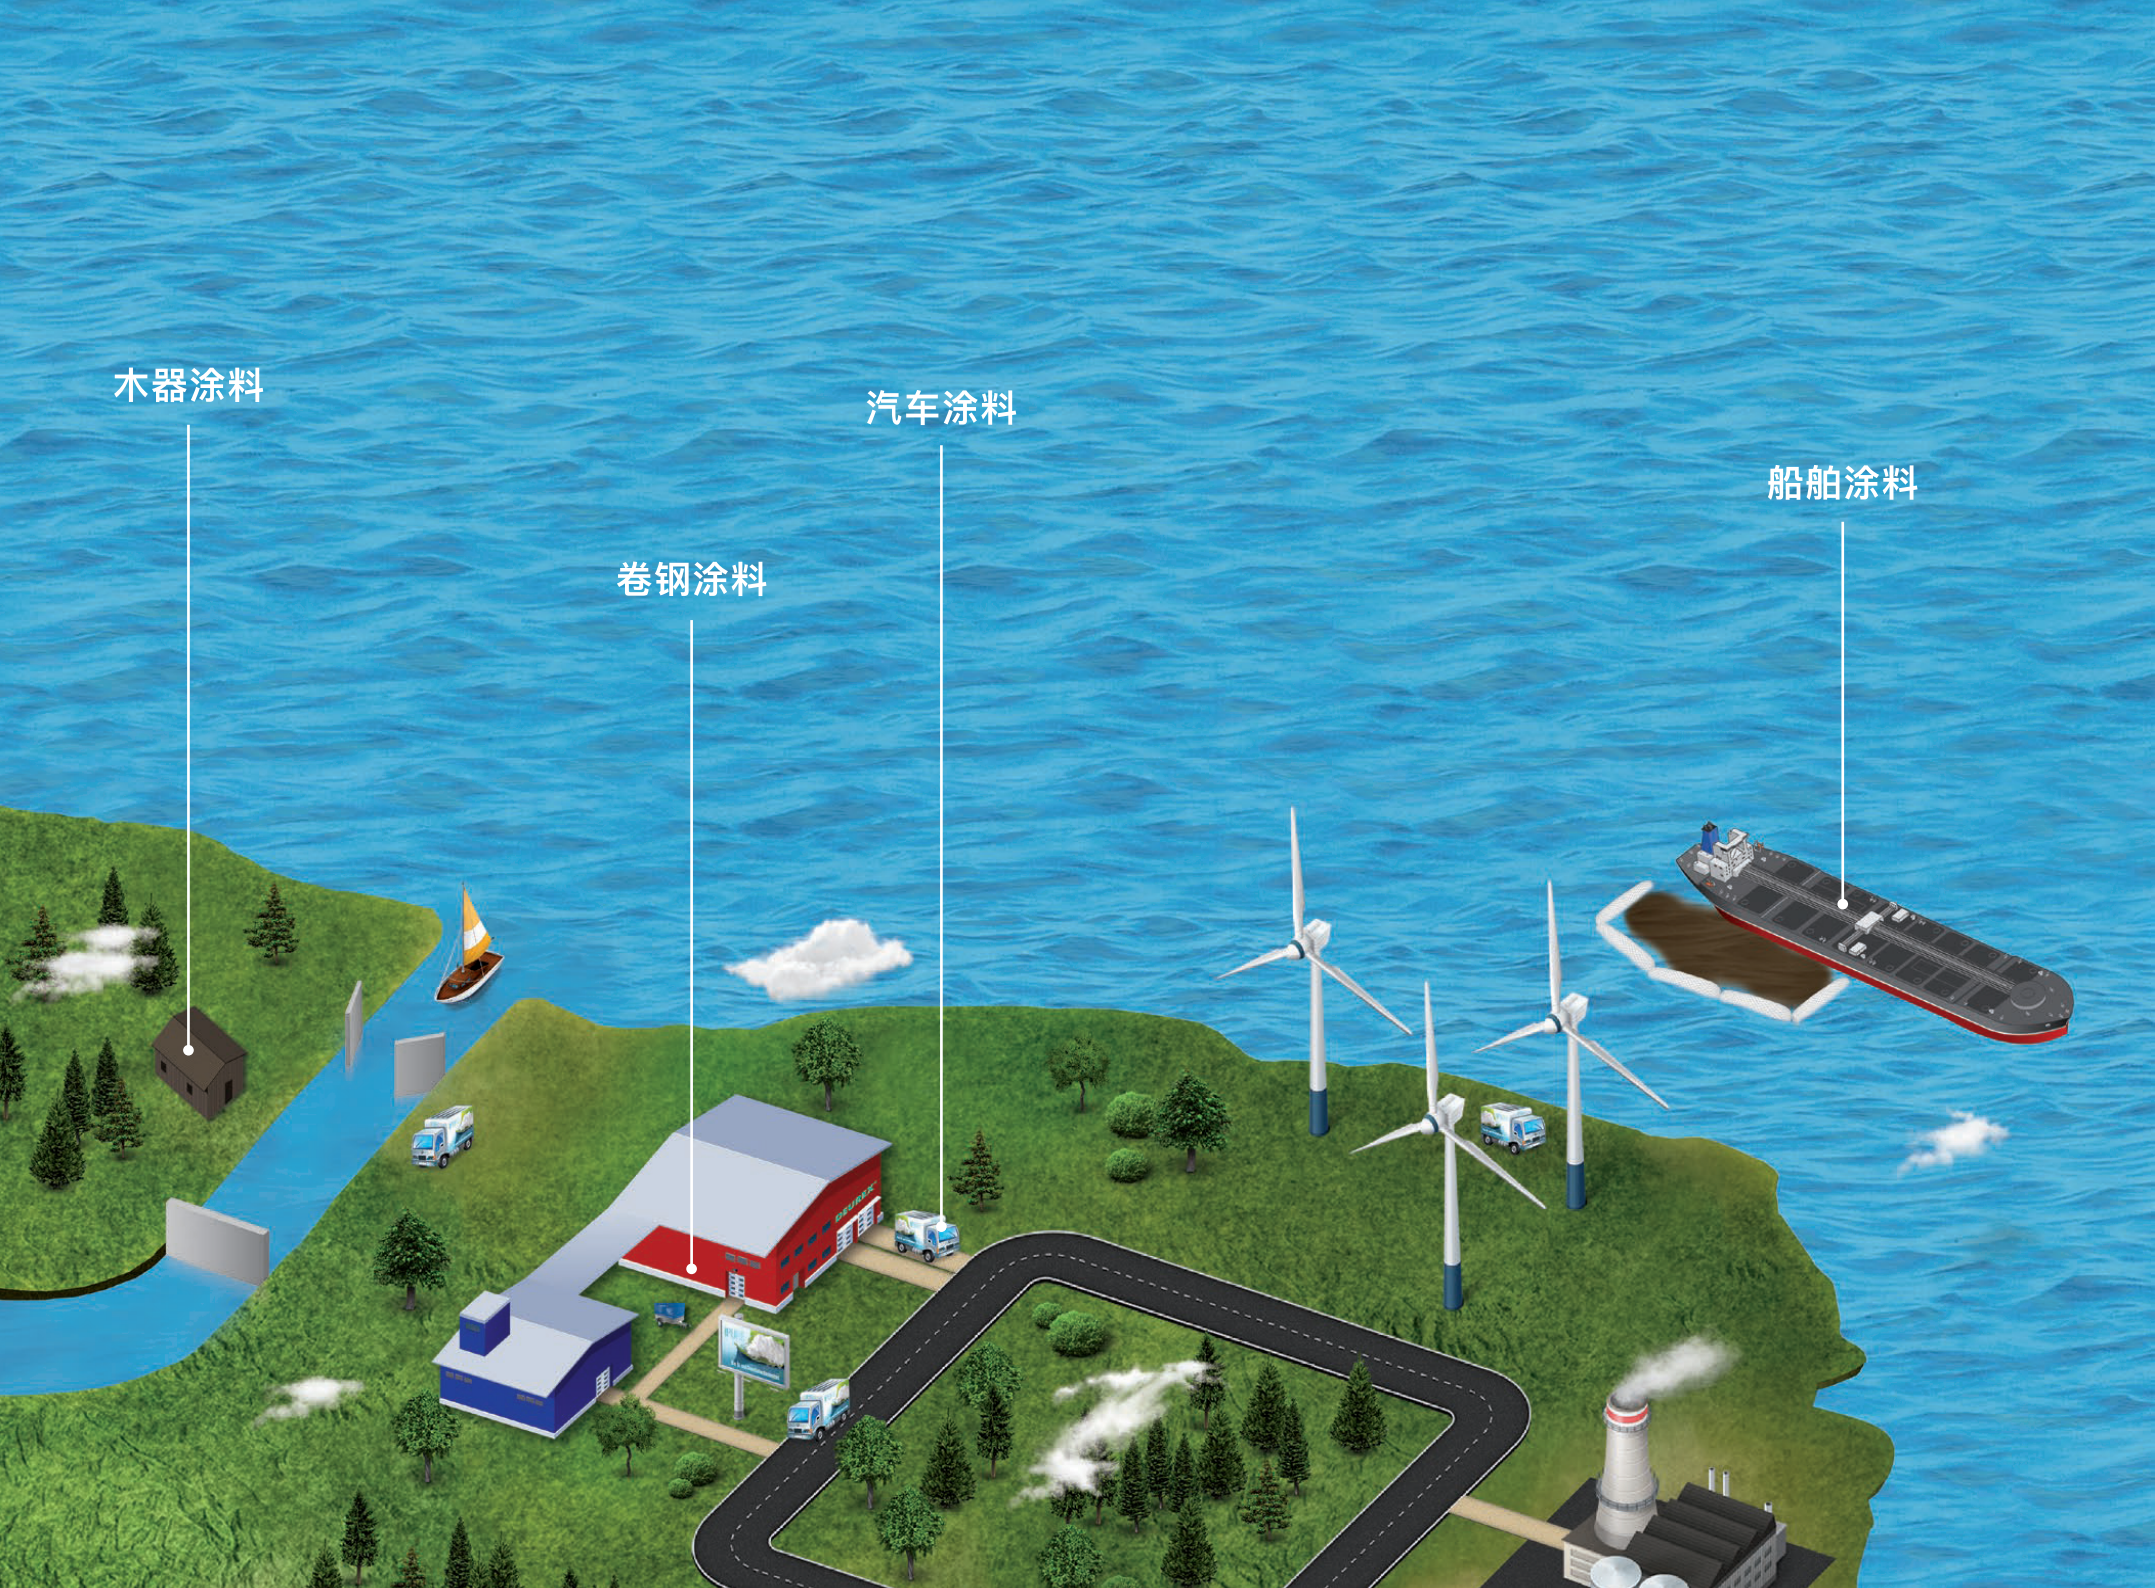

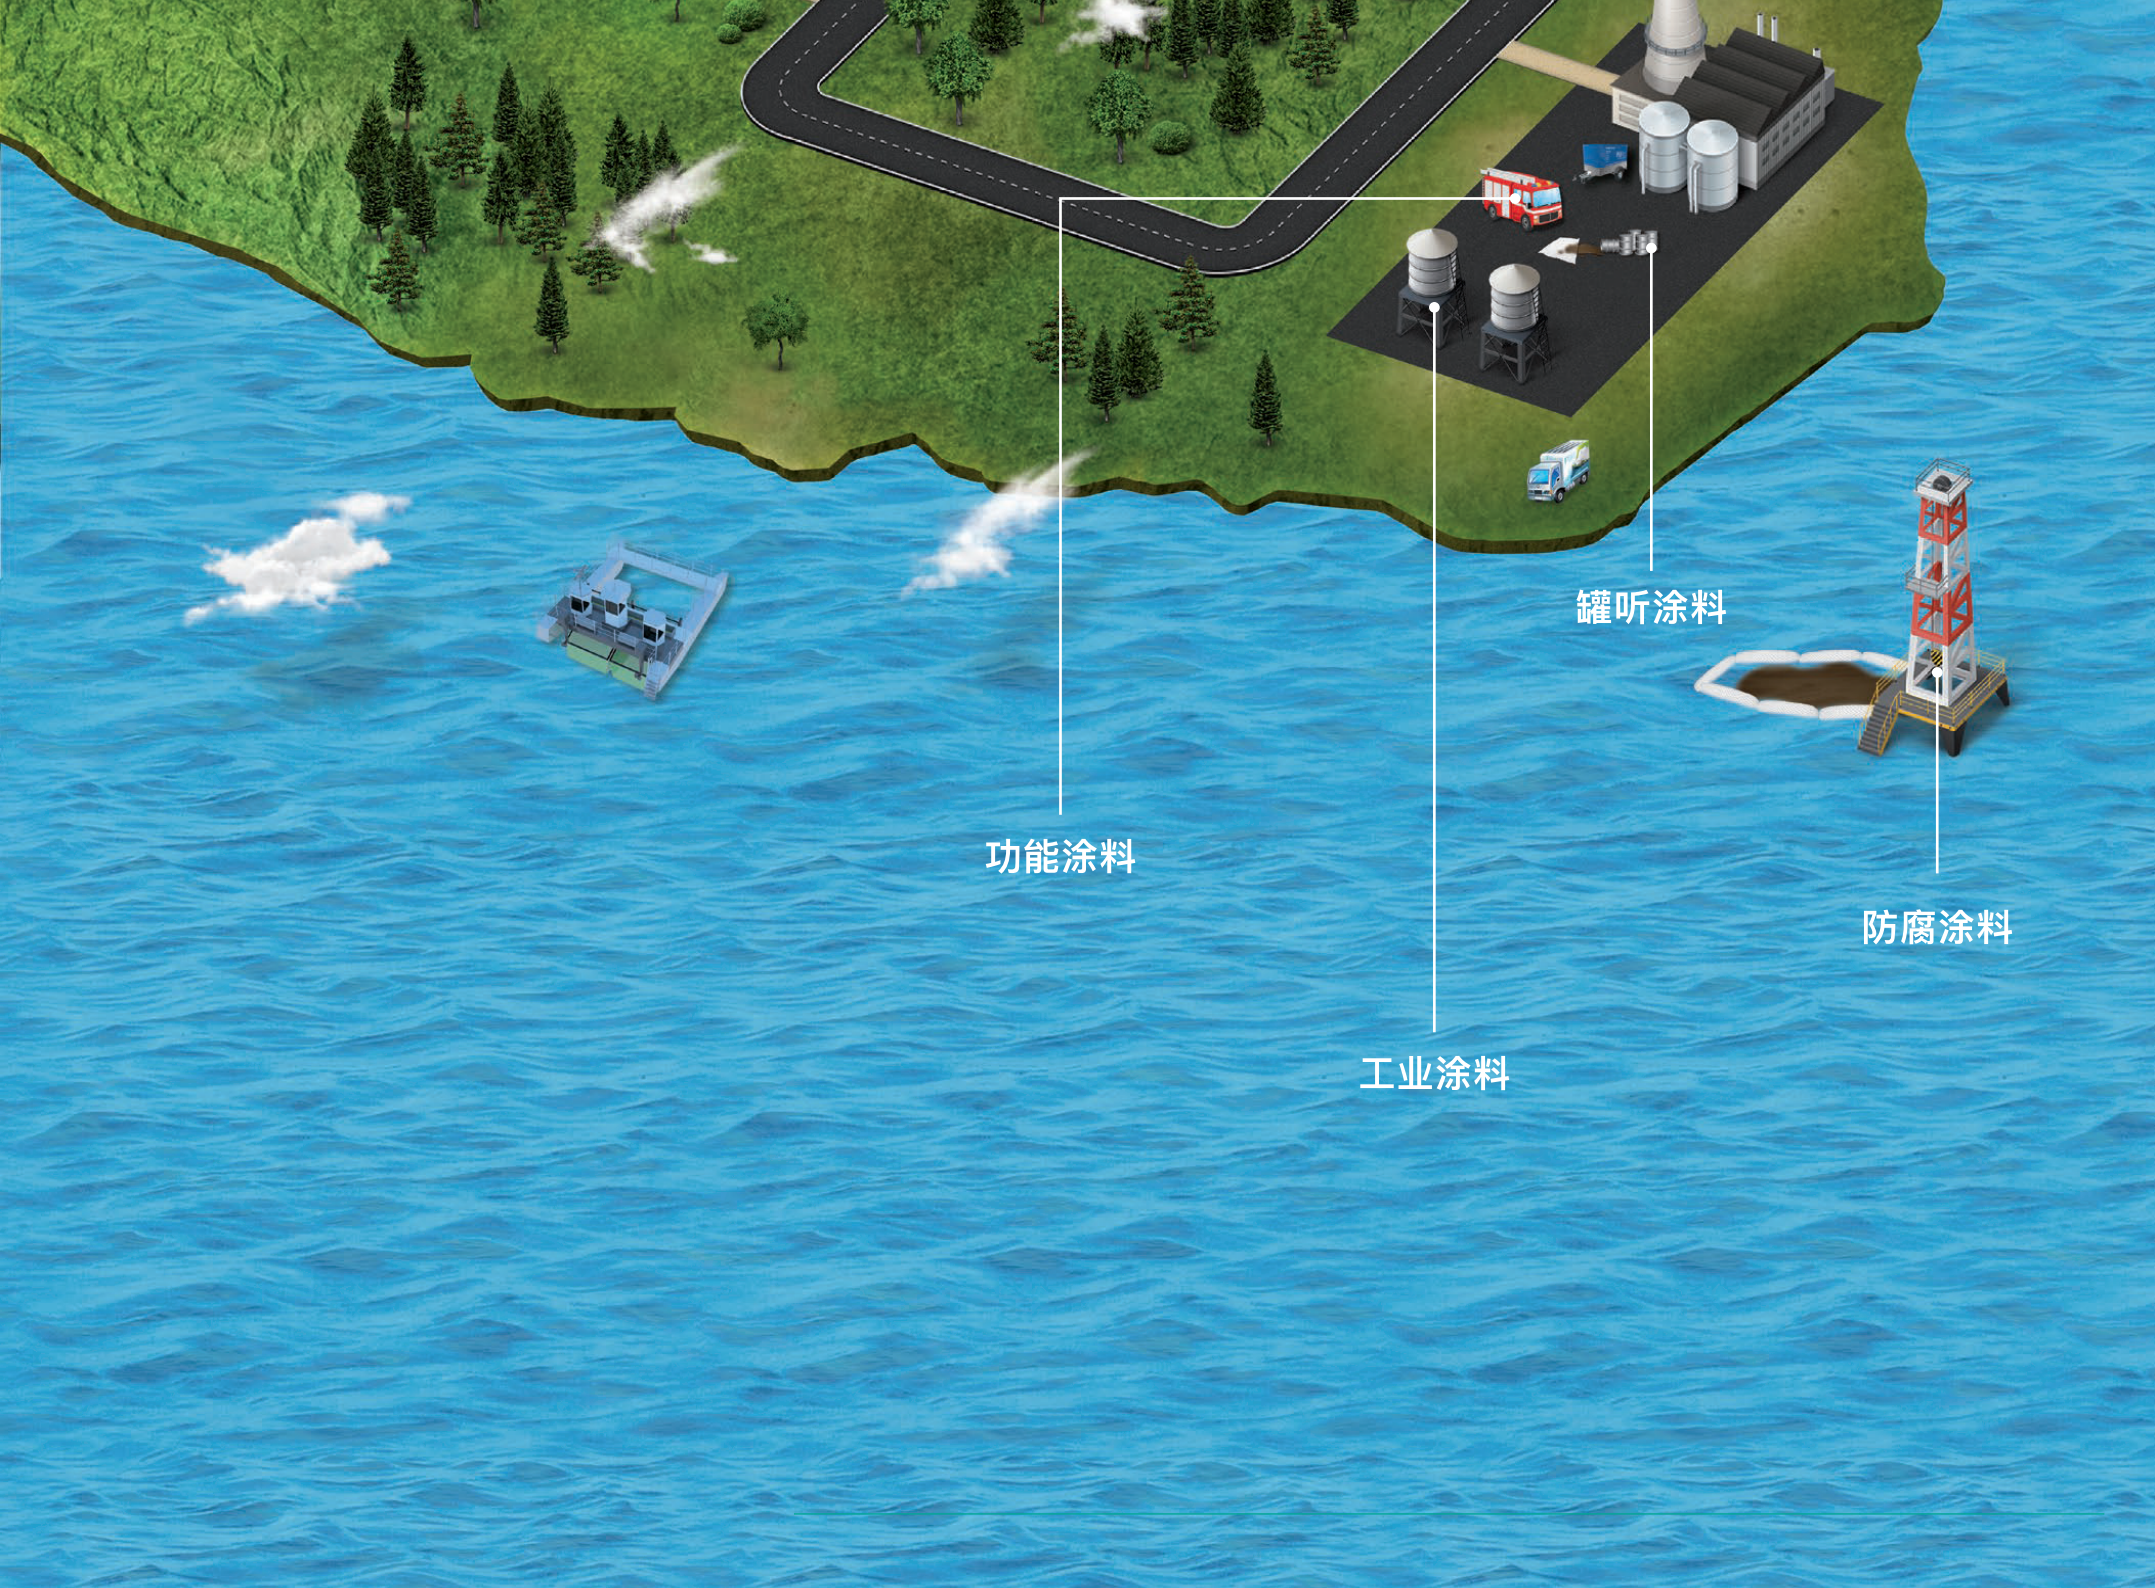

功能涂料

工业涂料

罐听涂料

防腐涂料



Waxes are substances defined by their mechanical-physical properties.

蜡是按照机械-物理性质而定义的物质,不同物质化学成分和来源各异,

Their chemical composition and origin are different. A substance is defined as a wax if it:

根据德国脂肪科学协会对蜡的定义(DGF 标准方法 MI 1 (75), 蜡必须具有以下属性:

- is kneadable at 20 °C,
- 20°C下具有可塑性;
- is solid to brittle,
- 形态由固到脆;
- has a coarse to microcrystalline structure,
- 结构由粗糙到微晶,
- is translucent to opaque,
- 色泽由半透明至不透明;
- is not glassy,
- 非玻璃般光亮透明;
- melts above 40 °C without decomposing,
- 40°C以上时,融化但不分解,
- is slightly liquid (less viscous) just above the melting point,
- 温度略高于熔点时,会呈(低粘度)微液体状;
- has a strongly temperature-dependent consistency and solubility,
- 粘稠度及可溶解度极为依赖温度,
- is polishable under slight pressure.
- 可在微压下抛光.

If more than one of the properties listed above are not fulfilled, the substance is not a wax as defined by the German Society for Fat Science (DGF standard method MI 1 (75)).

依照上述标准,如某物质有一项以上条件不满足,则不能被定义为蜡.

All data are typical values, based on our current knowledge and inform about our products and their applications. There is no assurance for certain properties and type values, only for reference, not constituting a guarantee for certain applications. The customer is responsible to care for the necessary safety measures and to ensure the appropriate handling of the product. Existing industrial property rights have to be considered. An unobjectionable quality is assured within the scope of our general terms and conditions. 2025/03



INDEX OF 索引

CONTENTS 目录

4

Biodegradable waxes
可生物降解蜡

7

Product Nomenclature
产品命名方法

8

Amide waxes
酰胺蜡

9

Fischer-Tropsch waxes
费托蜡

11

Hybrid waxes
混合蜡

12

Natural waxes
天然蜡

13

Polyethylene waxes
聚乙烯蜡

14

Oxidized waxes
氧化蜡

17

Polypropylene waxes
聚丙烯蜡

18

PTFE and PTFE coated waxes
PTFE(聚四氟乙烯)及PTFE涂层蜡

19

Silica and silica coated waxes
硅蜡及硅涂层蜡

19

Further additives
其他添加剂

Biodegradable waxes-DEUREX® BIO 可生物降解蜡DEUREX® BIO系列-微粒蜡

Micronized DEUREX® BIO DEUREX® BIO系列微粒蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	ACID VALUE 酸值 mg KOH/g	VISCOSITY 粘度 mPas	PENETRATION 针入度 dmm	PARTICLE SIZE 粒径 50 % <x µm
DEUREX® BIO 60 M	Biodegradable wax, micronized 可生物降解微粒蜡	70-80	20-30	<60	≤10	≤10
DEUREX® BIO 83 M	Biodegradable wax, micronized 可生物降解微粒蜡	78-88	≤1	<15	<42	≤10
DEUREX® BIO 87 M	Biodegradable wax, micronized 可生物降解微粒蜡	80-88	2-8	-	-	≤12
DEUREX® BIO 88 M	Biodegradable wax, micronized 可生物降解微粒蜡	95-102	≤10	≤20	≤3	≤8
DEUREX® BIO 102 M	Biodegradable wax, micronized 可生物降解微粒蜡	95-105	≤5	≤15	≤8	≤10
DEUREX® BIO 110 M	Biodegradable wax, micronized 可生物降解微粒蜡	104-116	5-10	<25	<1	≤10
DEUREX® BIO 111 M	Biodegradable wax, micronized 可生物降解微粒蜡	110-118	-	≤40	≤2	≤10
DEUREX® BIO 112 M	Biodegradable wax, micronized 可生物降解微粒蜡	110-120	-	<40	<1	<10
DEUREX® BIO 116 M	Biodegradable wax, micronized 可生物降解微粒蜡	104-119	0	≤40	≤7	≤10
DEUREX® BIO 119 M	Biodegradable wax, micronized 可生物降解微粒蜡	110-120	2-5	<15	<10	<10
DEUREX® BIO 129 M	Biodegradable wax, micronized 可生物降解微粒蜡	130-135	23-27	≤2000	≤2	≤10
DEUREX® BIO 130 M	Biodegradable wax, micronized 可生物降解微粒蜡	125-135	10-20	≤200	≤1	≤10
DEUREX® BIO 140 M	Biodegradable wax, micronized 可生物降解微粒蜡	140-150	3-8	<20	<4	≤10

Biodegradable waxes-DEUREX® BIO 可生物降解蜡DEUREX® BIO系列-颗粒蜡/蜡浆/蜡粉

Micronized DEUREX® BIO DEUREX® BIO系列-颗粒蜡/蜡浆/蜡粉	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	PENETRATION 针入度 dmm	EMULSIFIABILITY HLB 乳化度 HLB亲水亲油平衡值
DEUREX® BIO 60 G	Biodegradable wax, granules 可生物降解颗粒蜡	70-80	≤10	16
DEUREX® BIO 70 G	Biodegradable wax, granules 可生物降解颗粒蜡	75-85	10-20	13
DEUREX® BIO 72	Biodegradable wax, paste 可生物降解蜡浆	76-86	-	18
DEUREX® BIO 83 P	Biodegradable wax, powder 可生物降解蜡粉	78-88	<42	8
DEUREX® BIO 85 G	Biodegradable wax, granules 可生物降解颗粒蜡	90-97	≤30	12
DEUREX® BIO 88 G	Biodegradable wax, granules 可生物降解颗粒蜡	95-102	≤3	13
DEUREX® BIO 90 G	Biodegradable wax, granules 可生物降解颗粒蜡	90-105	≤6	0
DEUREX® BIO 95 K	Biodegradable wax, fine granules 可生物降解细颗粒蜡	100-110	<8	2
DEUREX® BIO 100 K	Biodegradable wax, fine granules 可生物降解细颗粒蜡	100-115	≤12	16
DEUREX® BIO 102 P	Biodegradable wax, powder 可生物降解蜡粉	95-105	≤8	8
DEUREX® BIO 105 G	Biodegradable wax, granules 可生物降解颗粒蜡	95-109	≤6	12
DEUREX® BIO 110 G	Biodegradable wax, granules 可生物降解颗粒蜡	104-116	<1	11
DEUREX® BIO 111 G	Biodegradable wax, granules 可生物降解颗粒蜡	110-118	<2	0
DEUREX® BIO 115 K	Biodegradable wax, fine granules 可生物降解细颗粒蜡	101-117	≤11	3
DEUREX® BIO 116 K	Biodegradable wax, fine granules 可生物降解细颗粒蜡	104-119	<7	0
DEUREX® BIO 119 P	Biodegradable wax, powder 可生物降解蜡粉	110-120	<10	10

Biodegradable waxes-DEUREX® BIO 可生物降解蜡DEUREX® BIO系列-蜡粉/细颗粒蜡及水性/油性分散体/乳剂

DEUREX® BIO	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	PENETRATION 针入度 dmm	EMULSIFIABILITY HLB 乳化度 HLB亲水亲油平衡值
DEUREX® BIO 127 P	Biodegradable wax, powder 可生物降解蜡粉	132-137	<1	11
DEUREX® BIO 128 P	Biodegradable wax, powder 可生物降解蜡粉	132-136	<2	7
DEUREX® BIO 129 P	Biodegradable wax, powder 可生物降解蜡粉	130-135	≤2	14
DEUREX® BIO 131 P	Biodegradable wax, powder 可生物降解蜡粉	130-135	≤2	15
DEUREX® BIO 140 K	Biodegradable wax, fine granules 可生物降解细颗粒蜡	140-150	<4	2

Liquid DEUREX® BIO	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT (蜡) 滴点 °C	ACID VALUE (蜡) 酸值 mg KOH/g	VISCOSITY (蜡) 粘度 mPas	PENETRATION (蜡) 针入度 Dmm	SOLID CONTENT 固含 %
DEUREX® BIO 88 D	Water based dispersion based on a biodegradable wax 基于可生物降解蜡的水性分散体	95-102	<10	<20	<3	42-44
DEUREX® BIO 111 D	Water based dispersion based on a biodegradable wax 基于可生物降解蜡的水性分散体	110-118	-	≤40	≤2	44-46
DEUREX® BIO 111 O	Oil based dispersion based on a biodegradable wax 基于可生物降解蜡的油性分散体	110-118	0	≤40	≤2	34-36
DEUREX® BIO 116 O	Oil based dispersion based on a biodegradable wax 基于可生物降解蜡的油性分散体	104-119	0	≤40	≤7	34-36
DEUREX® BIO 129 D	Water based dispersion based on a biodegradable wax 基于可生物降解蜡的水性分散体	130-135	23-27	≤2000	<2	49-51
DEUREX® BIO 129 E	Water based emulsion based on a biodegradable wax 基于可生物降解蜡的水性乳剂	130-135	23-27	<20	<2	34-36
DEUREX® BIO 129 O	Oil based dispersion based on a biodegradable wax 基于可生物降解蜡的油性分散体	130-135	23-27	≤2000	≤2	18-20
DEUREX® BIO 130 D	Water based dispersion based on a biodegradable wax 基于可生物降解蜡的水性分散体	125-135	10-20	≤200	≤1	34-36
DEUREX® BIO 131 E	Water based emulsion based on a biodegradable wax 基于可生物降解蜡的水性乳剂	130-135	27-33	<20	<2	34-36
DEUREX® BIO 140 D	Water based dispersion based on a biodegradable wax 基于可生物降解蜡的水性分散体	140-150	3-8	<20	<4	17-20

Product nomenclature 产品命名方法

本公司蜡产品命名方法如下:

Our product names are structured as follows:

以DEUREX H 9220 M举例,其中: DEUREX 为公司名称

Using the product name of DEUREX H 9220 M as an example, we show how our nomenclature is structured.

第二位的字母,是蜡产品的化学性质(Wax chemistry),可分为:

Wax chemistry

Amide wax	A
酰胺蜡	A
Carnauba wax	C
卡纳瓦棕榈蜡	C
Polyethylene wax	E
聚乙烯蜡	E
PTFE	F
聚四氟乙烯蜡	F

Hybrid wax	→ H
混合蜡	H
Polypropylene wax	P
聚丙烯蜡	P
Silica	S
硅蜡	S
Fischer-Tropsch wax	T
费托蜡	T
Sugar cane wax	X
甘蔗蜡	X

Product reference

92

Particle size (98 % <x μm)

20

Delivery forms

G	Granules
G	颗粒蜡
K	Fine granules
K	细颗粒蜡
P	Powder
P	蜡粉
D	Water based dispersion
D	水性蜡分散体
E	Water based emulsion
E	水性蜡乳剂

M	Micronized waxes
M	微粒蜡
O	Micronized waxes
O	油性蜡分散体
W	Water based dispersion
W	水性蜡分散体

DEUREX H 9220 M is a micronized hybrid

wax with a particle size of 98%<20 μm.

故而,DEUREX H 9220 M是一款粒径为98 % <20 μm的混合微粒蜡.

第三位的数字,分为两部分.其中前两位,为产品参考序号(Product reference),后两位数字,

则为产品粒径(Particle size, 单位98 % <x μm)

第四位的字母,则是产品的交付形态,可分为:

Amide waxes 酰胺蜡

WAXES 常规蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	ACID VALUE 酸值 mg KOH/g	VISCOSITY 粘度 mPas	PENETRATION 针入度 dmm	DENSITY 密度 g/cm ³
DEUREX A 20 K	Ethylene-Bis-Stearamide wax, fine granules 乙撑双硬脂酰胺细颗粒蜡	142-151	<10	<20	2-5	0.98-1.00
DEUREX A 24 K	Behenamide wax, fine granules 山嵛酸酰胺(二十二酰胺)细颗粒蜡	105-115	<1	<1	3-9	0.90-0.92
DEUREX A 25 P	Vegetable Ethylene-Bis-Oleamide wax, powder 植物基乙撑双油酸酰胺蜡粉	110-120	2-6	7-12	5-10	0.97-0.99
DEUREX A 26 P	Vegetable Erucamide wax, powder 植物基芥酸酰胺蜡粉	83-95	<1	<12	<45	0.87-0.88
DEUREX A 27 P	Vegetable Oleamide wax, powder 植物基油酸酰胺蜡粉	70-79	<1	6-11	2-5	0.91-0.92
DEUREX A 28 P	Vegetable Stearamide wax, powder 植物基硬脂酸酰胺蜡粉	100-110	<2	<12	2-8	0.90-0.91
DEUREX H 92 G	Hybrid wax, polyethylene wax and amide wax, granules 聚乙烯混酰胺蜡颗粒	130-140	<5	<40	<5	0.97-0.99
DEUREX X 20 K	Bio based, vegetable amide wax (EBS), fine granules 生物基植物酰胺(EBS乙撑双硬脂酰胺)细颗粒蜡	142-151	<6	<20	2-5	0.98-1.00

MICRONIZED WAXES 微粒蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	PARTICLE SIZE 粒径 98 % < x µm	VISCOSITY 粘度 mPas	PENETRATION 针入度 dmm	DENSITY 密度 g/cm ³
DEUREX A 2015 M	Bio based Ethylene-Bis-Stearamide wax, micronized 生物基乙撑双硬脂酰胺微粒蜡	142-151	<15	<15	2-5	0.98-1.00
DEUREX A 2035 M	Bio based Ethylene-Bis-Stearamide wax, micronized 生物基乙撑双硬脂酰胺微粒蜡	142-151	<35	<35	2-5	0.98-1.00
DEUREX A 2050 M	Bio based Ethylene-Bis-Stearamide wax, micronized 生物基乙撑双硬脂酰胺微粒蜡	142-151	<50	<50	2-5	0.98-1.00
DEUREX A 2520 M	Vegetable Ethylene-Bis-Oleamide wax, micronized 植物基乙撑双硬脂酰胺微粒蜡	110-120	<20	<20	5-10	0.97-0.99
DEUREX A 2625 M	Vegetable Erucamide wax, micronized 植物基芥酸酰胺微粒蜡	81-89	<25	<25	<45	0.87-0.88
DEUREX A 2830 M	Vegetable Stearamide wax, micronized 植物基硬脂酸酰胺微粒蜡	100-110	<30	<30	<8	0.90-0.91

LIQUID WAXES 液体蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT (蜡)滴点 °C	PARTICLE SIZE 粒径 98 % < x µm	pH VALUE 酸碱度	SOLID CONTENT 固含 %
DEUREX A 2008 W	Water based wax dispersion based on EBS wax 基于乙撑双硬脂酰胺(EBS)蜡的水性蜡分散体	142-151	<8	5-6	17-20



Fischer-Tropsch waxes 费托蜡

WAXES	CHEMICAL DESCRIPTION 产品化学描述	CONGEALING POINT 凝固点 °C	DROP POINT 滴点 °C	VISCOSITY 粘度 mPas	PENETRATION 针入度 dmm	DENSITY 密度 g/cm 3
DEUREX T 15	Fischer-Tropsch paraffin wax 费托石蜡	~ 50	47-55	-	<62	0.75-0.85
DEUREX T 17 G	Fischer-Tropsch wax, granules 费托颗粒蜡	~ 70	75-78	<10	10-15	0.85-0.90
DEUREX T 18 G	Micro-crystalline wax, granules 微晶颗粒蜡	~ 75	80-85	<20	10-25	0.75-0.85
DEUREX T 19 G	Fischer-Tropsch wax, granules 费托颗粒蜡	~ 80	92-104	<15	<5	0.89-0.91
DEUREX T 39 A	Modified Fischer-Tropsch wax, fine powder 改性费托细蜡粉	~ 100	110-120	<20	<1	0.94-0.95
DEUREX T 39 B	Modified Fischer-Tropsch wax, granules 改性费托颗粒蜡	~ 100	110-120	<40	<6	0.94-0.95
DEUREX T 39 K	Modified Fischer-Tropsch wax, fine granules 改性费托细颗粒蜡	~ 100	110-120	<40	<2	0.94-0.95
DEUREX T 49 K	Fischer-Tropsch wax, fine granules 费托细颗粒蜡	~ 100	111-120	<40	<1	0.94-0.95

Fischer-Tropsch waxes 费托微粒蜡及液体蜡乳剂

MICRONIZED WAXES 微粒蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	VISCOSITY 粘度 mPas	PENETRATION 针入度 dmm	DENSITY 密度 g/cm ³	PARTICLE SIZE 粒径 98 % <x μm
DEUREX T 3915 M	Modified Fischer-Tropsch wax, micronized 改性费托微粒蜡	110-120	<20	<2	0.94-0.95	<15
DEUREX T 3920 M	Modified Fischer-Tropsch wax, micronized 改性费托微粒蜡	110-120	<20	<2	0.94-0.95	<20
DEUREX T 4911 M	Fischer-Tropsch wax, micronized 费托微粒蜡	111-120	<20	<1	0.94-0.95	<11
DEUREX T 4915 M	Fischer-Tropsch wax, micronized 费托微粒蜡	111-120	<20	<1	0.94-0.95	<15
DEUREX T 4920 M	Fischer-Tropsch wax, micronized 费托微粒蜡	111-120	<40	<1	0.94-0.95	<20



LIQUID WAXES 液体蜡乳剂	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT (蜡)滴点 °C	pH VALUE 酸碱度	PENETRATION (蜡)针入度 dmm	SOLID CONTENT 固含 %	PARTICLE SIZE 粒径 98 % <x μm
DEUREX T 1501 W	Water based emulsion based on paraffin wax 基于石蜡的水性蜡乳剂	47-55	8-10	<62	49-51	<1
DEUREX T 1601 W	Water based emulsion based on paraffin wax 基于石蜡的水性蜡乳剂	60-70	7-9	<10	44-46	<1
DEUREX T 3901 W	Water based emulsion based on Fischer-Tropsch wax 基于费托蜡的水性蜡乳剂	110-120	6-8	<1	34-36	<1
DEUREX T 3908 W	Water based dispersion based on modified Fischer-Tropsch wax 基于改性费托蜡的水性蜡分散体	110-120	6.5-8.5	<1	44-46	<8
DEUREX T 3918 O	Oil based dispersion based on modified Fischer-Tropsch wax 基于改性费托蜡的油性蜡分散体	110-120		2	34-36	<18

Hybrid waxes 混合蜡

WAXES 常规蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	ACID VALUE 酸值 mg KOH/g	VISCOSITY 粘度 mPas	PENETRATION 针入度 dmm	DENSITY 密度 g/cm ³
DEUREX H 73 G	Bio based hybrid wax, Carnauba and hard paraffin, granules 生物基混合颗粒蜡(卡纳瓦棕榈蜡混硬石蜡)	95-105	<7	<40	<5	0.90-0.93
DEUREX H 81 G	Bio based hybrid wax, sugar cane and PE wax, granules 生物基混合颗粒蜡(甘蔗蜡混聚乙烯蜡)	90-110	15-25	<50	4-8	0.90-0.93
DEUREX H 92 G	Hybrid wax, PE, FT and amide wax, granules 聚乙烯(PE)蜡/费托(FT)蜡/酰胺蜡混合颗粒蜡	130-140	<5	-	<5	0.97-0.99

MICRONIZED WAXES 微粒蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	ACID VALUE 酸值 mg KOH/g	PARTICLE SIZE 粒径 98 % <x µm	PENETRATION 针入度 dmm	DENSITY 密度 g/cm ³
DEUREX H 7130 M	Bio based hybrid wax, Carnauba and paraffin, micronized 生物基混合微粒蜡(卡纳瓦棕榈蜡混石蜡)	81-88	<5	<30	<5	-
DEUREX H 7320 M	Bio based hybrid wax, Carnauba wax and paraffin, micronized 生物基混合微粒蜡(卡纳瓦棕榈蜡混石蜡)	95-105	<7	<20	<5	-
DEUREX H 7480 M	Hybrid wax, amide wax and lubricants, micronized 混合微粒蜡(酰胺蜡混润滑剂)	-	<8	<80	-	-
DEUREX H 9122 M	Hybrid wax, FT wax and PE wax, micronized 混合微粒蜡(费托蜡混聚乙烯蜡)	110-120	0	<22	<2	0.94 – 0.95
DEUREX H 9215 M	Hybrid wax, PE and amide wax, micronized 混合微粒蜡(聚乙烯蜡混酰胺蜡)	130-140	<5	<15	<5	0.97-0.99
DEUREX H 9220 M	Hybrid wax, PE, FT and amide wax, micronized 聚乙烯(PE)蜡/费托(FT)蜡/酰胺蜡混合微粒蜡	130-140	<5	<20	<5	0.97-0.99
DEUREX H 9415 M	Hybrid wax, FT wax and amide wax, micronized 混合微粒蜡(费托蜡混酰胺蜡)	135-145	<2	<15	<3	0.97-1.00
DEUREX H 9515 M	Hybrid wax, PE and FT and amide wax, micronized 聚乙烯(PE)蜡/费托(FT)蜡/酰胺蜡混合微粒蜡	135-145	<2	<15	<3	0.97-0.99
DEUREX H 9620 M	Hybrid wax, PP, PE, FT and amide wax, micronized 聚丙烯蜡/聚乙烯蜡/费托蜡/酰胺蜡混合微粒蜡	143-153	<2	<20	<3	0.97-0.99

Liquid WAXES 液体蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT (蜡) 滴点 °C	PARTICLE SIZE 粒径 98 % <x µm	SOLID CONTENT 固含 %
DEUREX H 7308 W	Water and bio-based dispersion based on hybrid wax 基于混合蜡的水性生物基蜡分散体	95-105	<8	42-44
DEUREX H 9108 W	Water based hybrid wax dispersion based on FT wax and PE wax 基于费托蜡及聚乙烯蜡的水性混合蜡分散体	110-120	<8	44-46
DEUREX H 9208 W	Water based hybrid wax dispersion, PE wax, FT wax and amide wax 基于聚乙烯(PE)蜡/费托(FT)蜡/酰胺蜡的水性混合蜡分散体	130-140	<8	33-36

Natural waxes 天然蜡

MICRONIZED WAXES 微粒蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	ACID VALUE 酸值 mg KOH/g	PARTICLE SIZE 粒径 98 % < x µm	PENETRATION 针入度 dmm	DENSITY 密度 g/cm ³
DEUREX C 0117 M	Carnauba wax T1, micronized T1级卡纳瓦棕榈微粒蜡	80-88	2-7	≤17	-	0.85-1.00
DEUREX C 0125 M	Carnauba wax T1, micronized T1级卡纳瓦棕榈微粒蜡	80-88	2-7	≤25	-	0.85-1.00
DEUREX C 0315 M	Carnauba wax T3, micronized T3级卡纳瓦棕榈微粒蜡	80-88	2-7	<15	<1	0.85-1.00
DEUREX C 0330 M	Carnauba wax T3, micronized T3级卡纳瓦棕榈微粒蜡	80-88	2-7	≤30	-	0.85-1.00
DEUREX H 7130 M	Bio based Hybrid wax, Carnauba wax and hard paraffins, micronized 生物基混合微粒蜡(卡纳瓦棕榈蜡混硬石蜡)	81-88	<5	≤30	≤5	-
DEUREX H 7320 M	Bio based Hybrid wax, Carnauba wax and hard paraffin, micronized 生物基混合微粒蜡(卡纳瓦棕榈蜡混硬石蜡)	95-105	<7	≤20	≤5	-
DEUREX X 2010 M	Bio based, vegetable amide wax (EBS), micronized 生物基植物酰胺(EBS)微粒蜡	142-151	<5	<10	1-3	0.98-1.00
DEUREX X 2016 M	Bio based, vegetable amide wax (EBS), micronized 生物基植物酰胺(EBS)微粒蜡	142-151	<5	<16	1-3	0.98-1.00
DEUREX X 5217 M	Bio based sugar cane wax, micronized 生物基甘蔗微粒蜡	72-82	20-30	<17	3-10	0.80-0.85

WAXES 常规蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	ACID VALUE 酸值 mg KOH/g	VISCOSITY 粘度 mPas	PENETRATION 针入度 dmm	DENSITY 密度 g/cm ³
DEUREX H 73 G	Bio based Hybrid wax, Carnauba wax and hard paraffin, granules 生物基混合颗粒蜡(卡纳瓦棕榈蜡混硬石蜡)	95-105	≤7	≤40	≤5	0.90-0.93
DEUREX X 20 K	Bio based vegetable amide wax (EBS), fine granules 生物基植物酰胺(EBS)细颗粒蜡	142-151	<6	<20	2-5	0.98-1.00
DEUREX X 52 G	Bio based sugar cane wax, granules 生物基甘蔗颗粒蜡	72-82	20-30	<60	3-10	0.80-0.85

LIQUID WAXES 液体蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT (蜡)滴点 °C	pH VALUE 酸碱度	PARTICLE SIZE 粒径 98 % < x µm	PENETRATION (蜡)针入度 dmm	SOLID CONTENT 固含 %
DEUREX H 7308 W	Water and bio based wax dispersion based on veg. amide wax 基于植物酰胺蜡的水性生物基蜡分散体	95-105	6-8	<8	-	42-44
DEUREX X 2008 W	Water and bio based wax dispersion based on veg. amide wax 基于植物酰胺蜡的水性生物基蜡分散体	142-151	6-7	<8	1-3	17-20

Polyethylene waxes 聚乙烯蜡-颗粒蜡/细颗粒蜡及蜡片

WAXES 蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	VISCOSITY 粘度 mPas	PENETRATION 针入度 dmm	DENSITY 密度 g/cm ³
DEUREX E 06 K	Non polar low-melting polyethylene wax, fine granules 非极性低熔点聚乙烯细颗粒蜡	90-99	< 40	8-20	0.94-0.96
DEUREX E 08	Non polar polyethylene wax, fine granules 非极性聚乙烯细颗粒蜡	112-120	400-600	< 1	0.93-0.94
DEUREX E 09 K	Non polar hardest polyethylene wax, fine granules 非极性最硬质聚乙烯细颗粒蜡	104-118	< 40	3-6	0.94-0.96
DEUREX E 10 K	Non polar polyethylene wax, fine granules 非极性聚乙烯细颗粒蜡	102-112	< 20	10-20	0.94-0.96
DEUREX E 11 B	Non polar low molecular polyethylene wax, granules 非极性低分子量聚乙烯颗粒蜡	100-120	< 80	7-15	0.94-0.96
DEUREX E 11 K	Non polar low molecular polyethylene wax, fine granules 非极性低分子量聚乙烯细颗粒蜡	102-118	< 80	7-11	0.91-0.96
DEUREX E 12 K	Non polar medium molecular polyethylene wax, fine granules 非极性中分子量聚乙烯细颗粒蜡	100-110	< 200	3-8	0.93-0.94
DEUREX E 13	Non polar high molecular polyethylene wax, fine granules 非极性高分子量聚乙烯细颗粒蜡	114-122	< 800	0.5-1.0	0.93-0.94
DEUREX E 14 K	Non polar medium molecular polyethylene wax, fine granules 非极性中分子量聚乙烯细颗粒蜡	105-120	500-700	< 2	0.91-0.96
DEUREX E 18 K	Non polar high molecular polyethylene wax, fine granules 非极性高分子量聚乙烯细颗粒蜡	112-120	< 250	1-4	0.93-0.95
DEUREX EV 03	Copolymere PE vinyl acetate wax, fine granules 聚乙烯-醋酸乙烯酯共聚物细颗粒蜡	96-104	200-600	< 7	0.93-0.95
DEUREX V 2	Polyvinylether wax, flakes 聚乙烯醚蜡片	60-66	50-150	1-3	0.93-0.94



Polyethylene waxes 聚乙烯蜡-微粒蜡/液体蜡

MICRONIZED WAXES 微粒蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	VISCOSITY 粘度 mPas	PENETRATION 针入度 dmm	DENSITY 密度 g/cm ³	PARTICLE SIZE 粒径 98 % < x µm
DEUREX E 0915 M	Non polar polyethylene wax, micronized 非极性聚乙烯微粒蜡	104-118	104-118	2-5	0.94-0.96	< 15
DEUREX E 0920 M	Non polar polyethylene wax, micronized 非极性聚乙烯微粒蜡	104-118	104-118	3-6	0.94-0.96	< 20

LIQUID WAXES 液体蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT (蜡)滴点 °C	pH VALUE 酸碱度	PENETRATION (蜡)针入度 dmm	SOLID CONTENT 固含 %	PARTICLE SIZE 粒径 98 % < x µm
DEUREX E 0908 W	Water based dispersion based on PE wax 基于聚乙烯蜡的水性蜡分散体	104-118	6.5-8.5	2-5	44-46	< 8
DEUREX E 0918 O	Oil based wax dispersion based on PE wax 基于聚乙烯蜡的油性蜡分散体	104-118	-	2-5	34-36	< 18
DEUREX E 1101 W	Water based emulsion based on PE wax 基于聚乙烯蜡的水性蜡乳剂	110-120	5.5-7.5	3-7	34-36	< 1



Oxidized waxes 氧化蜡

WAXES 蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	ACID VALUE 酸值 mg KOH/g	VISCOSITY 粘度 mPas	PENETRATION 针入度 dmm	DENSITY 密度 g/cm ³
DEUREX EO 40 K	Modified oxidized polar polyethylene wax, fine granules 改性氧化极性聚乙烯细颗粒蜡	98-112	3-10	< 120	5-10	0.94-0.96
DEUREX EO 41 K	Oxidized MDPE wax, fine granules 氧化中密度聚乙烯细颗粒蜡	98-104	15-19	< 250	3-6	0.92-0.94

WAXES 蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	ACID VALUE 酸值 mg KOH/g	VISCOSITY 粘度 mPas	PENETRATION 针入度 dmm	DENSITY 密度 g/cm ³
DEUREX EO 42	Oxidized polar polyethylene wax, fine granules 氧化极性聚乙烯细颗粒蜡	105-113	14-19	< 300	2	0.93-0.95
DEUREX EO 43 P	Wet oxidized HDPE wax, powder 湿式氧化法-高密度聚乙烯蜡粉	134-137	6-8	< 25,000	< 0.5	0.97-0.99
DEUREX EO 44 P	Wet oxidized HDPE wax, powder 湿式氧化法-高密度聚乙烯蜡粉	132-135	15-19	< 4,000	< 0.5	0.97-0.99
DEUREX EO 45 P	Wet oxidized HDPE wax, powder 湿式氧化法-高密度聚乙烯蜡粉	132-135	23-27	< 2,500	< 0.5	0.97-0.99
DEUREX EO 45 TEX	Texturing agent, powder 纹理剂粉末	132-135	23-27	< 2,500	0.5	0.97-0.99
DEUREX EO 46 P	Wet oxidized HDPE wax, powder 湿式氧化法-高密度聚乙烯蜡粉	132-135	28-32	< 2000	< 0.5	0.97-0.99
DEUREX EO 47 P	Wet oxidized HDPE wax, powder 湿式氧化法-高密度聚乙烯蜡粉	132-135	33-37	< 1600	< 0.5	0.97-0.99
DEUREX EO 75 K	Oxidized emulsifiable polyethylene wax, fine granules 可乳化-氧化聚乙烯细颗粒蜡	100-113	5-9	< 20	3-6	0.92-0.94
DEUREX EO 76 K	Oxidized emulsifiable polyethylene wax, fine granules 可乳化-氧化聚乙烯细颗粒蜡	100-113	10-14	< 20	6-10	0.92-0.94
DEUREX EO 77 K	Oxidized emulsifiable polyethylene wax, fine granules 可乳化-氧化聚乙烯细颗粒蜡	100-110	15-19	< 20	7-11	0.92-0.94
DEUREX EO 78 K	Oxidized emulsifiable polyethylene wax, fine granules 可乳化-氧化聚乙烯细颗粒蜡	100-110	20-24	< 20	9-12	0.92-0.94



Oxidized waxes 氧化蜡

WAXES 蜡	CHEMICAL DESCRIPTION 产品化学描述	CONGEALING POINT 凝固点 °C	ACID VALUE 酸值 mg KOH/g	VISCOSITY 粘度 mPas	PENETRATION 针入度 dmm	DENSITY 密度 g/cm ³
DEUREX TO 19 G	Hydrophilic, oil-free hard paraffin, granules 亲水无油硬石蜡颗粒	77-85	20-25	< 20	< 30	0.85-0.90
DEUREX TO 80 G	Oxidized Fischer-Tropsch wax, granules 氧化费托蜡颗粒	97-103	2-4	< 20	< 1	0.94-0.95
DEUREX TO 81 G	Oxidized Fischer-Tropsch wax, granules 氧化费托蜡颗粒	104-114	5-10	< 20	< 1	0.94-0.95
DEUREX TO 82 G	Oxidized Fischer-Tropsch wax, granules 氧化费托蜡颗粒	94-100	15-20	< 20	< 2	0.94-0.95
DEUREX TO 83 G	Oxidized Fischer-Tropsch wax, granules 氧化费托蜡颗粒	93-98	25-35	< 20	< 4	0.94-0.95
DEUREX TO 84 G	Oxidized Fischer-Tropsch wax, granules 氧化费托蜡颗粒	87-95	35-45	< 20	< 6	0.94-0.95



MICRONIZED WAXES 微粒蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	ACID VALUE 酸值 mg KOH/g	PARTICLE SIZE 粒径 98 % < x µm	PENETRATION 针入度 dmm	DENSITY 密度 g/cm ³
DEUREX EO 4515 M	Oxidized HDPE, micronized 氧化高密度聚乙烯微粒蜡	132-135	< 30	< 15	< 0.5	0.97-0.99
DEUREX EO 4519 ABS	Micronized oxidized HDPE wax with built-in anti-blocking system 自带防堵(防粘连)系统的高密度氧化聚乙烯微粒蜡	138-143	13-17	< 19	1-2	0.97-0.99
DEUREX EO 4520 M	Oxidized HDPE wax, micronized 氧化高密度聚乙烯微粒蜡	132-135	< 30	< 20	< 0.5	0.97-0.99
DEUREX EO 4530 M	Oxidized HDPE wax, micronized 氧化高密度聚乙烯微粒蜡	132-135	< 30	< 30	< 0.5	0.97-0.99
DEUREX EO 4545 M	Oxidized HDPE wax, micronized 氧化高密度聚乙烯微粒蜡	132-135	< 30	< 45	< 0.5	0.97-0.99
DEUREX EO 4560 M	Oxidized HDPE wax, micronized 氧化高密度聚乙烯微粒蜡	132-135	< 30	< 60	< 0.5	0.97-0.99
DEUREX TO 8120 M	Oxidized Fischer-Tropsch wax, micronized 氧化费托微粒蜡	104-114	5-10	< 20	< 1	0.94-0.95

Oxidized waxes 氧化蜡-液体蜡

LIQUID WAXES 液体蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT (蜡)滴点 °C	pH VALUE 酸碱度	PARTICLE SIZE 粒径 98 % < x µm	PENETRATION (蜡)针入度 dmm	SOLID CONTENT 固含 %
DEUREX EO 4401 W	Water based emulsion based on oxidized HDPE wax 基于氧化高密度聚乙烯蜡的水性乳剂	133-136	7-10	-	< 0.5	34-36
DEUREX EO 4508 W	Water based dispersion based on polar oxidized HDPE 基于极性氧化高密度聚乙烯蜡的水性分散体	132-135	-	< 8	< 0.5	49-51
DEUREX EO 4518 O	Oil based wax dispersion based on oxidized hardwax 基于氧化硬质蜡的油性蜡分散体	132-135	-	-	< 0.5	18-20
DEUREX EO 4701 W	Water based emulsion based on oxidized HDPE wax 基于氧化高密度聚乙烯蜡的水性乳剂	132-135	9-10	-	-	34-36
DEUREX TO 8201 W	Water based emulsion based on oxidized FT wax 基于费托蜡的水性蜡乳剂	111-116	-	< 1	< 2	33-37

Polypropylene waxes 聚丙烯蜡

WAXES 蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	ACID VALUE 酸值 mg KOH/g	VISCOSITY 粘度 mPas	PENETRATION 针入度 dmm	DENSITY 密度 g/cm 3
DEUREX P 36 G	Non polar polypropylene wax, granules 非极性聚丙烯颗粒蜡	150-170	< 2	60-130	< 2	0.87-0.89
DEUREX P 37 P	Polypropylene wax, powder 聚丙烯蜡粉	145-165	0	100-200	< 1	0.87-0.89
DEUREX P 36 TEX	Texturing agent, powder 纹理剂蜡粉	150-170	0	60-130	< 2	0.87-0.89
DEUREX P 38 G	Modified polypropylene wax, granules 改性聚丙烯颗粒蜡	145-155	< 5	< 50	< 5	0.92-0.98

MICRONIZED WAXES 微粒蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	ACID VALUE 酸值 mg KOH/g	PARTICLE SIZE 粒径 98 % < x µm	PENETRATION 针入度 dmm	DENSITY 密度 g/cm 3
DEUREX P 3615 M	Polypropylene wax, micronized 聚丙烯微粒蜡	150-170	< 2	< 15	< 2	0.87-0.89
DEUREX P 3620 M	Polypropylene wax, micronized 聚丙烯微粒蜡	150-170	0	< 20	< 2	0.87-0.89
DEUREX P 3720 M	Polypropylene wax, micronized 聚丙烯微粒蜡	145-165	0	< 20	< 1	0.87-0.89
DEUREX P 3820 M	Modified polypropylene wax, micronized 改性聚丙烯微粒蜡	145-155	< 5	< 20	< 5	0.92-0.98

LIQUID WAXES 液体蜡	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT (蜡) 滴点 °C	pH VALUE 酸碱度	PARTICLE SIZE 粒径 98 % < x µm	PENETRATION (蜡) 针入度 dmm	SOLID CONTENT 固含 %
DEUREX P 3601 W	Water based emulsion based on polypropylene wax 基于聚丙烯蜡的水性蜡乳剂	150-170	8.0-9.0	< 1	< 1	39-41
DEUREX P 3608 W	Water based dispersion based on polypropylene wax 基于聚丙烯蜡的水性蜡分散体	150-170	6.5-8.5	< 8	< 2	44-46
DEUREX P 3618 O	Oil based wax dispersion based on polypropylene wax 基于聚丙烯蜡的油性蜡分散体	150-170	-	-	< 2	18-20
DEUREX P 3808 W	Water based dispersion based on modified polypropylene wax 基于改性聚丙烯蜡的水性蜡分散体	145-155	6-8	< 8	< 3	34-36

PTFE and PTFE coated waxes 聚四氟乙烯(PTFE)及聚四氟乙烯涂层蜡

WAXES 蜡	CHEMICAL DESCRIPTION 产品化学描述	MELTING POINT (蜡) 熔点 °C	MELTING POINT (PTFE) 熔点 °C	DENSITY (蜡) 密度 g/cm ³	DENSITY (PTFE) 密度 g/cm ³	PARTICLE SIZE 粒径 98 % < x µm
DEUREX F 6008 M	PTFE, micronized PTFE微粒蜡	-	316 - 326	-	2.1 - 2.3	< 10
DEUREX F 6114 M	PTFE double coated wax, micronized PTFE双涂微粒蜡	110 - 120	316 - 326	0.94 - 0.95	2.1 - 2.3	< 14
DEUREX F 62 TEX	PTFE fully coated wax, powder PTFE全涂蜡粉	110 - 120	336 - 349	0.94 - 0.95	2.1 - 2.3	-
DEUREX F 6214 M	PTFE fully coated wax, micronized PTFE全涂微粒蜡	110 - 120	316 - 326	0.94 - 0.95	2.1 - 2.3	< 14
DEUREX F 63 TEX	PTFE spot coated wax, powder PTFE点涂蜡粉	110 - 120	336 - 349	0.94 - 0.95	2.1 - 2.3	-
DEUREX F 6310 M	PTFE spot coated wax, micronized PTFE点涂微粒蜡	110 - 120	316 - 326	0.94 - 0.95	2.1 - 2.3	< 11
DEUREX F 6314 M	PTFE spot coated wax, micronized PTFE点涂微粒蜡	110 - 120	316 - 326	0.94 - 0.95	2.1 - 2.3	< 14
DEUREX F 64 TEX	PTFE eco coated wax, powder PTFE生态涂层蜡粉	110 - 120	336 - 349	0.94 - 0.95	2.1 - 2.3	-
DEUREX F 6414 M	PTFE eco coated wax, micronized PTFE生态涂层微粒蜡	110 - 120	316 - 326	0.94 - 0.95	2.1 - 2.3	< 15

PTFE DISPERSIONS 聚四氟乙烯分散体	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT (蜡)滴点 °C	MELTING POINT (PTFE) 熔点 °C	SOLID CONTENT 固含 %	PARTICLE SIZE 粒径 98 % <x µm
DEUREX F 6012 O	Oil based dispersion based on PTFE 基于PTFE的油性分散体	-	316 - 326	49 - 51	< 12
DEUREX F 6312 O	Oil based dispersion based on PTFE coated wax 基于PTFE涂层蜡的油性分散体	110 - 120	316 - 326	34 - 36	< 12
DEUREX F 6408 W	Water based dispersion based on PTFE coated wax 基于PTFE涂层蜡的水性分散体	110 - 120	316 - 326	44 - 46	< 8

Silica and silica coated waxes 硅蜡及硅涂层蜡

PRODUCT 产品	CHEMICAL DESCRIPTION 产品化学描述	DENSITY (蜡)密度 g/cm ³	DENSITY (硅)密度 g/cm ³	MELTING POINT (硅)熔点 °C	PARTICLE SIZE 粒径 98 % <x µm
DEUREX S 3119 M	Silica double coated wax, micronized 硅双涂微粒蜡	0.97 - 0.99	2.00 - 2.50	< 1,600	< 19
DEUREX S 3219 M	Silica fully coated wax, micronized 硅全涂微粒蜡	0.97 - 0.99	2.00 - 2.50	< 1,600	< 19

Further additives 其他添加剂

ADDITIVES 添加剂	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	DENSITY 密度 g/cm ³	PARTICLE SIZE 粒径 98 % <x µm
DEUREX D 6520 M	Double coated wax with diamondlike hardness, micronized 具有类钻石硬度的双涂微粒蜡	130 - 140	0.97 - 0.99	< 20
DEUREX D 6515 M	Double coated wax with diamondlike hardness, micronized 具有类钻石硬度的双涂微粒蜡	130 - 140	0.97 - 0.99	< 15

	CHEMICAL DESCRIPTION 产品化学描述	DROP POINT 滴点 °C	SOLID CONTENT 固含 %	PARTICLE SIZE 粒径 98 % <x µm
Printplex M	EDTA-Na ₂ , micronized 微粒化的乙二胺四乙酸二钠(EDTA-Na ₂)	-	-	≤ 18
Printplex O	Oil based dispersion of EDTA-Na ₂ 乙二胺四乙酸二钠(EDTA-Na ₂)的油性分散体	-	49 - 51	≤ 12



	CHEMICAL DESCRIPTION 产品化学描述	HDPE / WAX 高密度聚乙烯/蜡	DROP POINT 滴点 °C	DENSITY (WAX) (蜡)密度 g/cm ³	PARTICLE SIZE 粒径 98 % < x µm
Masterwax Antiblock	Bio based wax additive for paints and coatings, micronized 油漆及涂料用生物基微蜡添加剂	-	115 - 130	0.96 - 0.98	< 15
Masterwax 300	DEUREX® wax non coated HDPE 非经多乐科思蜡涂的高密度聚乙烯	100% / 0%	110 - 120	0.94 - 0.95	< 300
Masterwax 305	DEUREX® wax spot coated HDPE 经多乐科思蜡点涂的高密度聚乙烯	95% / 5%	110 - 120	0.94 - 0.95	< 300
Masterwax 310	DEUREX® wax eco coated HDPE 经多乐科思蜡生态涂的高密度聚乙烯	90% / 10%	110 - 120	0.94 - 0.95	< 300
Masterwax 325	DEUREX® wax fully coated HDPE 经多乐科思蜡全涂的高密度聚乙烯	75% / 25%	110 - 120	0.94 - 0.95	< 300
Masterwax 350	DEUREX® wax double coated HDPE 经多乐科思蜡双涂的高密度聚乙烯	50% / 50%	110 - 120	0.94 - 0.95	< 300
PEEK coated waxes 聚醚醚酮涂层蜡	For more information visit deurex.com 更多信息请参考网站 deurex.com	COMING SOON! 即将上市			



Biodegradable waxes to avoid microplastics

DEUREX®
THE WAX COMPANY



DEUREX® BIO





上海晟望新材料科技有限公司

邮箱: william.zeng@sw-tech.com.cn

网址: www.sw-tech.com.cn

地址: 上海市奉贤区沪杭公路

228弄2号楼607室

电话: 021-67152325



长沙宝瑞化工科技有限公司

0731-84788232

佛山新匠新材料有限公司

0757-27389993

海普纳新材料科技（东莞）有限公司

13713375050

山东瓦特山助剂有限公司

18678893658

DEUREX®

THE WAX COMPANY

DEUREX AG

Dr.-Bergius-Straße 8-12

D-06729 Elsteraue

Phone +49 (0) 34 41 - 8 29 29 29

Fax +49 (0) 34 41 - 8 29 29 28

www.deurex.com

info@deurex.com